

## Contact Chauvet

### **USA**

Technical Assistance: (954) 929-1115 Press (4)  
E-Mail [tech@chauvetlighting.com](mailto:tech@chauvetlighting.com)

## Caution

Always use safety pins.  
Do not over tighten  
Never exceed the load capacity.

## **Technical Specifications**

Box Dimensions: 110cm x 47cm x 22.5cm / 43" x 18.5" x 9"

Weight: 20.25 Kg / 45 lbs

### **User Information (Please complete for your records)**

Date Purchased:     /     /

Serial No: \_\_\_\_\_

Dealer Stamp:

**Model: CH-PAR38PACK PAR-38 SYSTEM**



# **CHAUVET®**

*Value · Innovation · Performance*

## **PAR-38 SYSTEM**

### **CH-PAR38PACK**

## **User Guide**

Please read these instructions carefully before use


### World-wide Headquarters:

3000 North 29th Ct.  
Hollywood, FL 33020

Tel: +1-954-929-1115 Fax: +1-954-929-5560

1-800-762-1084

[www.ChauvetLighting.com](http://www.ChauvetLighting.com)

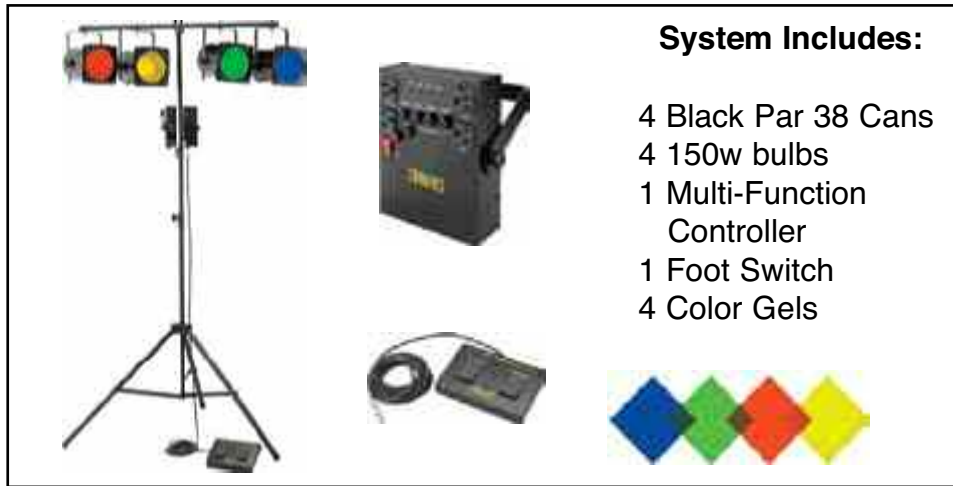

### System Includes:

- 4 Black Par 38 Cans
- 4 150w bulbs
- 1 Multi-Function Controller
- 1 Foot Switch
- 4 Color Gels

## Introduction

Congratulations on the purchase of your new CHAUVET par lighting system. We are confident you will enjoy many trouble free hours with this unit. To assist with the care and use of the product we have prepared this short guide.

## System Components

The PAR-38 SYSTEM comes complete with 4-Par 38 black cans, 4-150w bulbs, 1-Lightweight stand, 1-4 channel multi-function controller, 1-Foot switch, and 4-Colored gels.

## Operation

Multi-Function Controller/Foot Switch-

The unit has been designed to hold a maximum 2,400 watts. Unit features 4 channels with one AC outlet per channel. Simply plug par cans into the AC outlets on the front. Unit will chase to music via the built in microphone and automatically advance through the built in 16 chase patterns. Indicator lights on top of unit will flash according to pattern. Adjust sound sensitivity via knob on front of unit. Controllers may be linked for added versatility via CH-DIN10 linking cable (sold separately). Utilize Foot Switch to control the functions. Functions include All On, Chasing, and Blackout

Lightweight Stand- **WARNING: DO NOT OVERTIGHTEN KNOBS OR SCREWS**

Loosen leg extension knob and pull outwards on legs to widest position for optimum stability. Tighten leg extension knob. Tighten set screw with supplied allen wrench.

Loosen lower pole extension knob and pull pole upwards to fully extend lower pole. Tighten pole extension knob. Tighten set screw with supplied allen wrench.

Loosen lighting bar knob. Snap lighting bar into upper pole extension.

Using supplied mounting screws, secure par cans to lighting bar. Take care to balance weight evenly.

Loosen upper pole extension knob and raise pole to desired height. Stand extends a maximum of 9ft.

## Installation/Mounting

This unit has been designed to be set on a flat level surface. Failure to do so could cause serious injury.

## Cleaning

The body of the unit should be cleaned with a soft damp cloth.

## Maintenance & Servicing

Work on internal parts should be carried out by a qualified technician. Removal of any covers other than the lamp replacement access or the fuseholder is considered a breach of warranty and will not be covered under any such agreement unless authorized first by CHAUVET.