
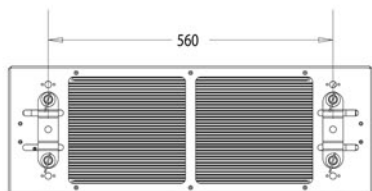
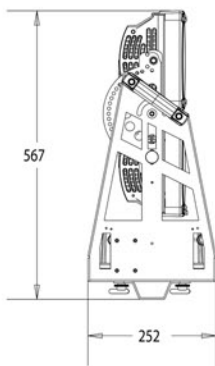


COLORado™ Range IP SPECIFICATIONS & FEATURES

CHAUVET®

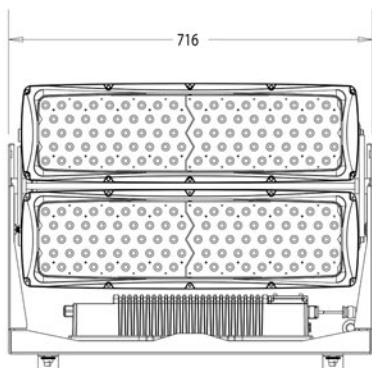

AT A GLANCE:

RGBAW Color Mixing



Key Features:

- RGBAW Color Mixing
- IP66 Rated
- Independent panel positioning
- 5 Distinct Dimming Curves
- Color temperature presets



About this light:

The COLORado Range IP is an indoor/outdoor high-power wash. The fixture is suited for long throw applications with independently adjustable LED arrays to cover a large surface. The independently adjustable heads allow for precise focusing or to split the output onto different surfaces. RGBWA LEDs allow for a nearly endless palette of colors, from rich, saturated color to subtle pastels.

DETAILED SPECIFICATIONS:

CONTROL FEATURES

- 3, 4, 5, 6, 7, 10, or 17-channel RGBWA LED indoor/outdoor wash light
- Operating modes:
 - 3-channel: RGB control
 - 3-channel: HSV control
 - 4-channel: RGB, dimmer
 - 5-channel: RGBWA control
 - 6-channel: RGBWA, dimmer
 - 7-channel: RGBWA, dimmer, strobe
 - 10-channel: RGBWA block mode (control each panel individually)
 - 17-channel: dimmer, block 1 RGBWA, block 2 RGBWA, color macro, strobe, auto/custom, speed, dimmer speed, ID addressing
- RGBWA color mixing with or without DMX control
- Color temperature presets (3,200 ~10,000 K)
- Built-in automated programs
- Recall auto and custom programs via DMX

ADDITIONAL FEATURES

- Five distinct dimming curves
- LCD display with password protection
- Die-cast aluminum, powder coat finish housing
- Ingress protection IP66
- Color Calibration
- Omega bracket mounting system

SPECIFICATIONS

- 15° installed optics **single head** 30° optional optics **single head**
- Beam angle: 12° Beam angle: 25.5°
- Field angle: 25.1° Field angle: 50°
- Lux: 1,037 @ 5 m Lux: 617 @ 5m
- Light source: 108 x 5 W LEDs, 50,000 hrs
(1,750 mA red, green, blue, white, amber)
- Power and current: 120 V, 60 Hz: 527 W, 6 A (operating), 8.6 A (inrush)
230 V, 50 Hz: 529 W, 2.6 A (operating), 3.9 A (inrush)
- AC power: Auto-ranging 100~240 V 50/60 Hz
- Power cable with plug: 65 in (1,651 mm)
- IP66 power extension cable: 103 in (2,604 mm)
- IP66 signal extension cable: 103 in (2,604 mm)
- DMX input cable: 6.5 in (165 mm)
- DMX output cable: 6.5 in (165 mm)
- Weight: 89 lbs (40.3 kg)
- Size: 31.8 x 10 x 22 in (808 x 252 x 560 mm)

OPTIONS

- 16.4 ft (5 m) power extension cable (IP5POWER)
- 16.4 ft (5 m) signal extension cable (IP5SIG)

www.chauvetlighting.com
info@chauvetlighting.com

CHAUVET®