


# COLORdash Batter



Brackets included for connecting multiple units.

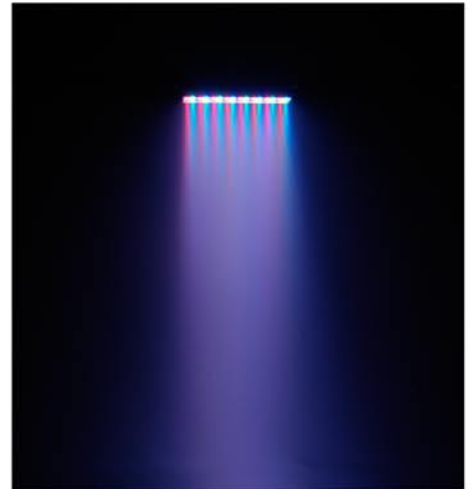

## FEATURES

- DMX channels: 3, 4, 10, or 12-channel
- Operating modes
  - 3-channel: RGB control
  - 4-channel: RGB, dimmer
  - 10-channel: RGB, ID address, dimmer, macro, strobe, auto/custom, auto speed, module select
  - 12-channel: RGB of 4 separate sections
- Colors LED: RGB
- Dimmer: Electronic
- Built-in automated programs via master/slave, DMX or COLOR-CON
- Program and recall custom programs via master/slave, DMX or COLOR-CON
- Adjustable fan speeds
- Additional threaded hole on rear for mounting (size M 10)
- Attach multiple units together with the included bracket
- Includes 6.6 ft (2 m) power extension cable
- LCD display with password protection
- Transfer custom programs between fixtures
- Double-bracket yoke doubles as floor stand
- Color Calibration

## SPECIFICATIONS

- DMX connectors: 3-pin
- Light source: 24 1 w (8 red, 350 mA; 8 green, 350 mA; 8 blue, 350 mA) LEDs
- Beam angle: 29.5°
- Field angle: 55.4°
- Illuminance: 86.5 lux @ 5 m
- Power linking: 13 units @ 120 V / 23 units @ 230 V
- Input voltage: auto-ranging 100-240 VAC 50/60 Hz
- Power and current: 44.7 W, 0.7 A @ 120 V 60 Hz
- Power and current: 42 W, 0.4 A @ 230 V 50 Hz
- Weight: 7.9 lbs (3.6 kg)
- Size: 3.1 x 17.5 x 7.4 in (80 x 444 x 188 mm)
- Approvals: CE, ETL